



# Compact CKX/CKXE Fact Sheet

## Standard Features

- Single boiler system
- 4 programable, volumetric dosing touch pads
- Turn style steam knob
- Direct Water Connection
- **Automatic (CKXE) and Semiautomatic (CKX) versions**

## Color Options

- Stainless Steel




	CKXE - Automatic	CKX - Semiautomatic
Total Wattage	1,300 watt	1,300 watt
Heating Element	1,200 watt	1,200 watt
Boiler	2 ltr	2 ltr
Net Weight	53 lbs	53 lbs
Approx Ship Weight	100 lbs	100 lbs
Measurements W x D x H	13" x 18" x 17"	13" x 18" x 17"
Power	110 volt/ 11.7 amps	110 volt/ 11.7 amps

**Water Requirements**

- 3/8" dedicated cold water line with shut off valve and compression fitting.
- Water hardness cannot exceed 3gpg or 50ppm.
- Water softener must be installed if it exceeds the limits.
- Minimum incoming water flow rate of 35 GPH and the maximum line pressure of 70 PSI/5 BAR

**Drain Requirements**

Open gravity drain of minimum 1.25 inch within 4 feet of the machine

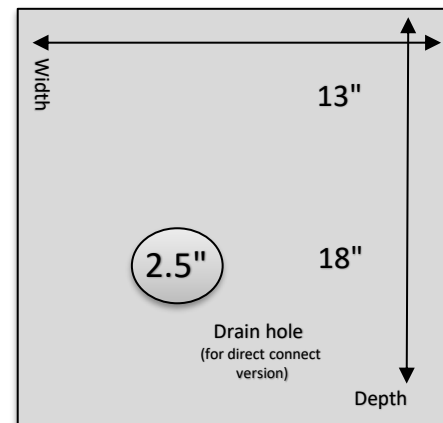

\*Updated 5/2018